

Seal Classification


- security Seal
- Tensile strength > 250kgs

Material

- The lock housing is ZINC and covered with ABS
- The wire is NPC galvanized cable

Working Temperature

- 50°C to 120°C

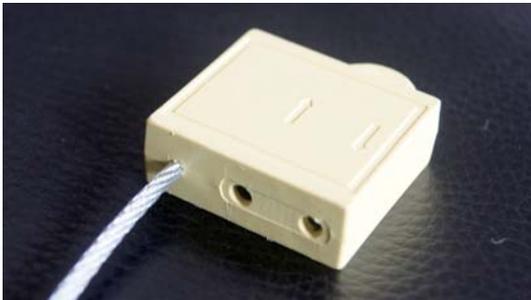


How to open it ?

- Cut the metal wire.

Printing

- Laser engraving or stamp
- Company Logo/Name; Sequential number
- The readable bar code is available

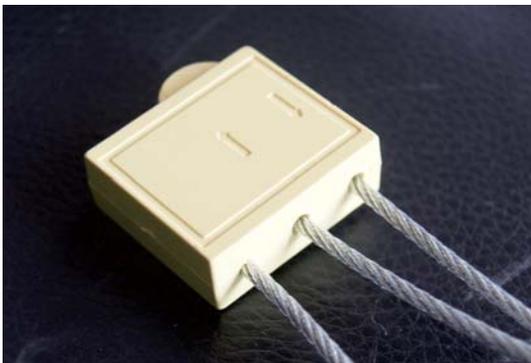

Package

- 1000pcs per carton
- Net weight: 14.5kgs
- Gross weight: 16.0kgs
- Measure: 350*260*170mm

Production standard

- ISO 17712/PAS
- ISO 9001: 2008

Color

The standard color




Black White Orange Red Blue Green Yellow







Correct user guide and NPC wire

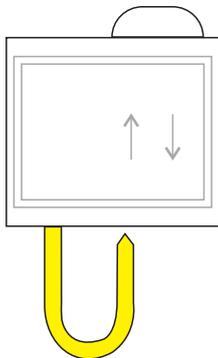


Step 1
Pull the wire through the inner hole

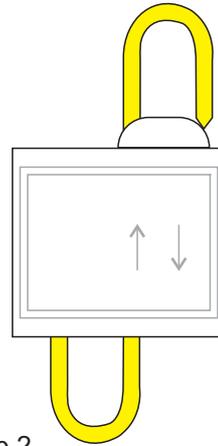

Step 2
On another side
Pull the wire through the beside hole



Step 2
Pull the wire tightly and the wire under the groove.
cut the wire end tip.

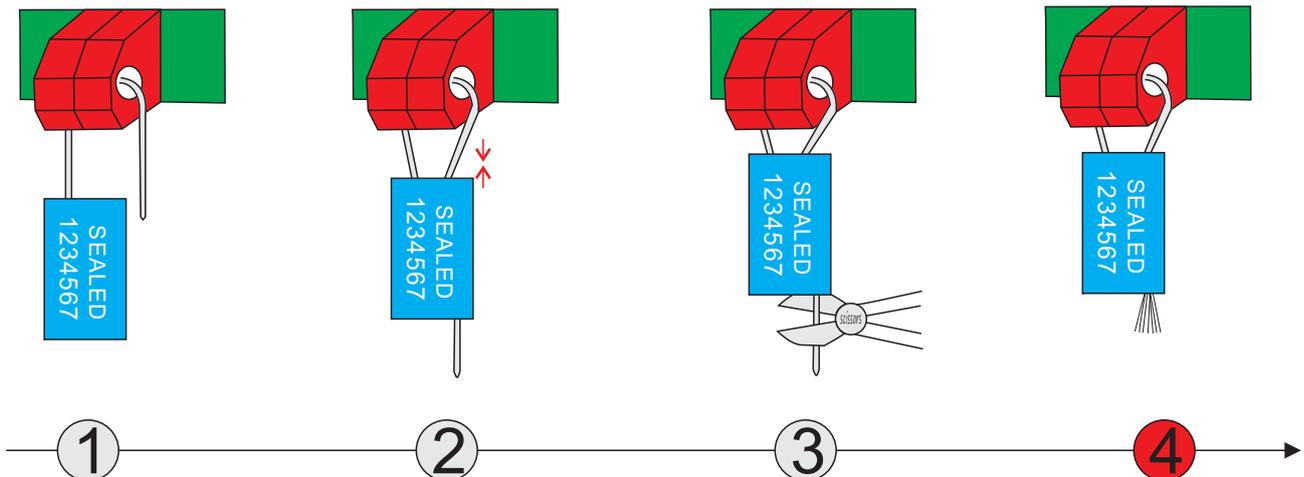

- ① Ready to seal it.
- ② Pull tight the wire very near to the lock chamber.
- ③ Cut the wire.
- ④ Because it is NPC wire, after cutting the wire, The wire scatter by itself.