




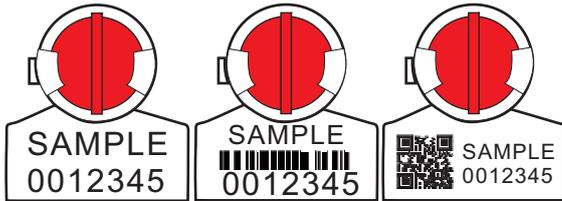

Double wings on the lock housing.

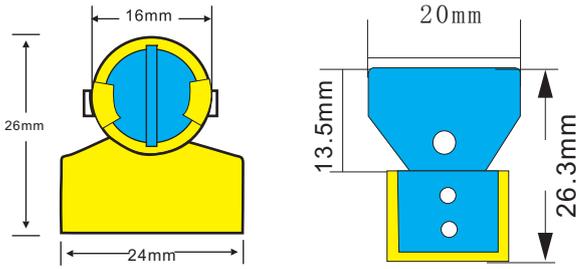


Printing

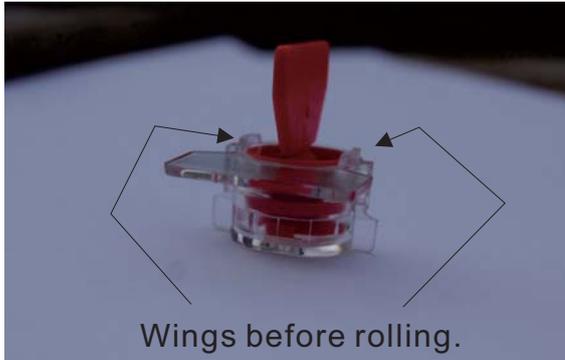

Wings before rolling.



Wings after rolling.

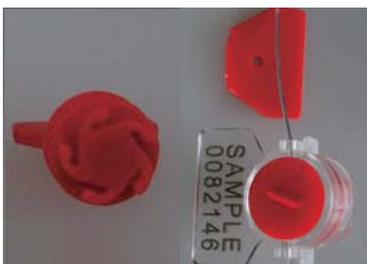

Five strong anti-rotation horns can ensure that can not be reversed

The big rotor ear (13.5*20mm) can help the users install the seals easily

Seal Classification

- Indicative Seal
- Load to Failure : >35kgs(77lbs)

Material

- The transparent body and color insert are the same high quality plastic material "Polycarbonate".

Wire

- Plastic coated stainless steel 304 wire rope
Diameter: 0.7mm semi-transparent or in white.
- The wire is optional. not must.

Working Temperature

- 50°C to 120°C

Security

- Double wings on the lock housing. more security.

How to open it ?

- Cut the metal wire.

Printing



- Laser engraving
- Company Logo/Name; Sequential number
- Bar code decoration is also available

Package (300mm)

- 100pcs per transparent bag
- 1000pcs per box
- 5000pcs per carton
- Net weight: 22kgs
- Gross weight: 23kgs
- Measure: 670*425*340mm

Production standard

- ISO 17712/PAS
- ISO 9001: 2008

Especially inquiry

- the body can be semi-transparent with color

Color

The standard color



Black White Orange Red Blue Green Yellow

Stock Color




Red Blue



no wings

two wings

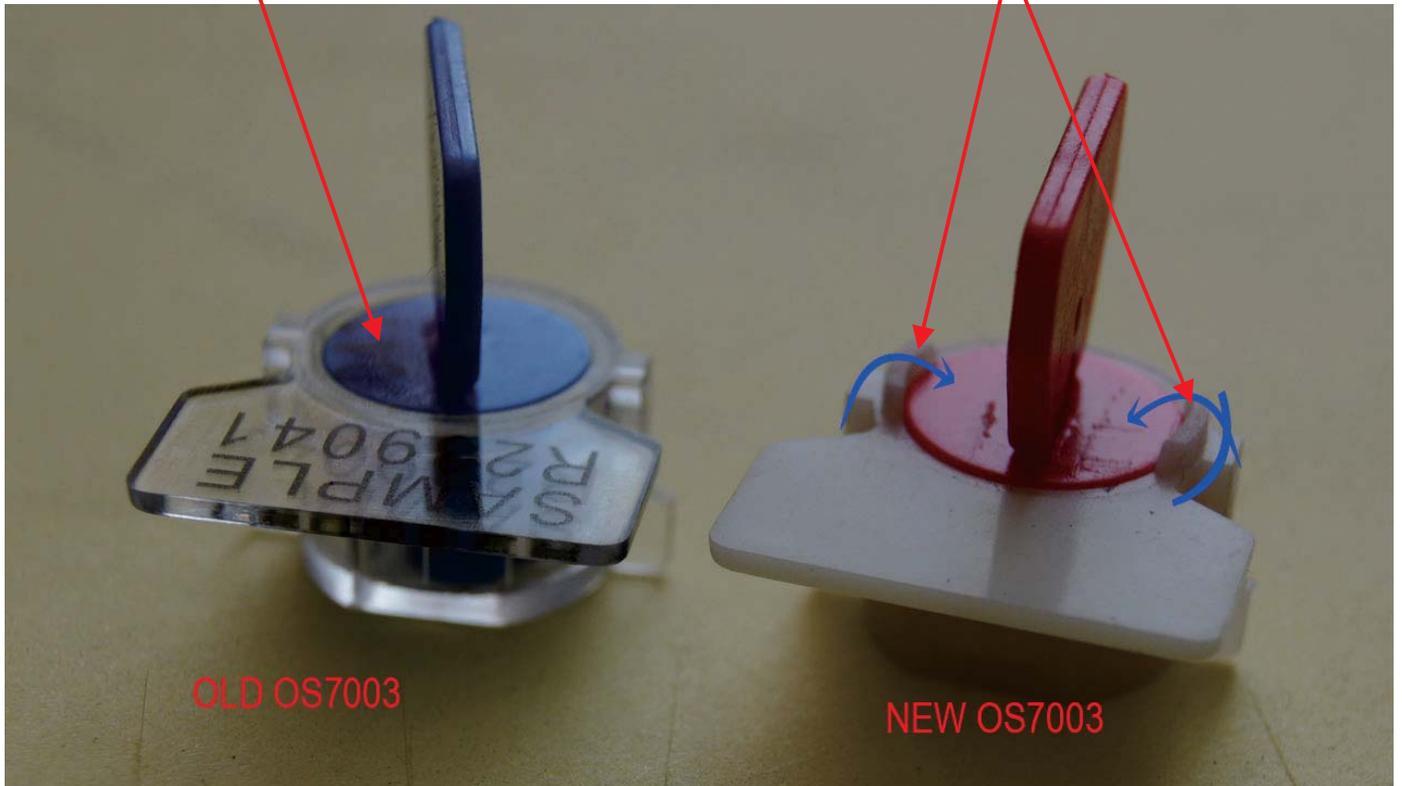


Risk without wings:

the color insert is possible be to be took out from the lock housing when the seals is in the liquid of around 150 degree centigrade.

Advantage:

It is impossible to be took out with two wings.

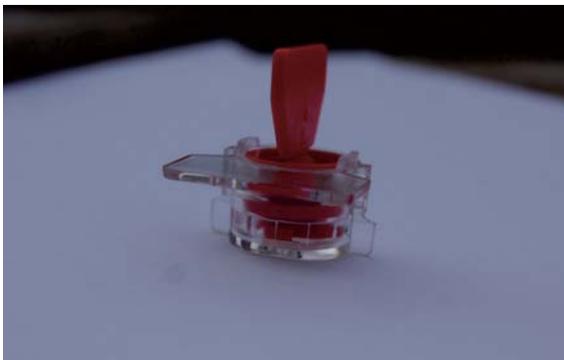

we call it wings.