




Appearance patent ZL 2013 3 0124207.6


Utility model structure patent :
ZL 2013 2 0229306.5

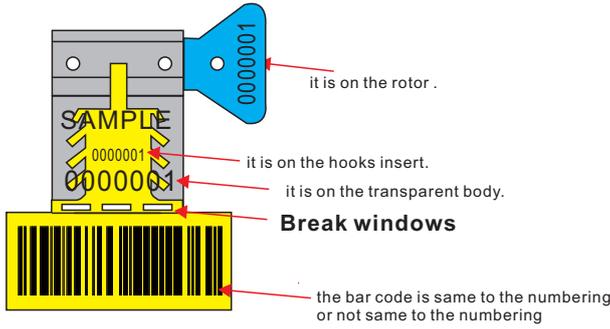

Three same numbers on the different position.

OR

Three Different numbers on the different position.

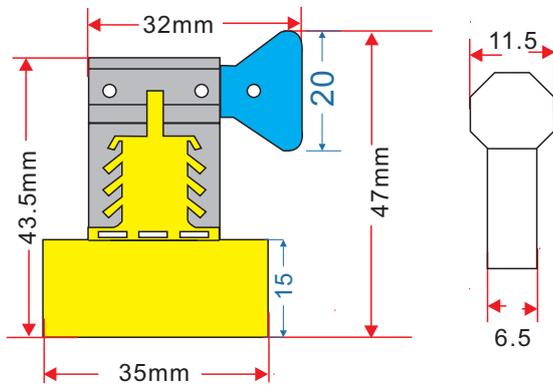

Eight security lock teeth insert

Seal Classification

- Indicative Seal
- Load to Failure (kN): 55kgs (118.8lbs)

Material

- High quality plastic: polycarbonate

Wire

- Plastic coated stainless steel wire rope
Diameter: 0.7mm semi-transparent or in white.
- The wire is optional. not must.

Working Temperature

- 50°C to 120°C

How to open it ?

- Cut the metal wire.

Printing

- Laser engraving
- Company Logo/Name
- Sequential number
- Bar code decoration is also available



Package

- 100pcs per transparent bag
- 1000pcs per box
- 5000pcs per carton
- Net weight: 25kgs
- Gross weight: 26kgs
- Measure: 670*425*340mm

Production standard

- ISO 17712/PAS
- ISO 9001: 2008

The reason why you choose it

- It is not welded
- Eight security lock teeth insert
- There are three same numbers on transparent body, rotor ear and lock insert.

Color

The standard color




Black White Orange Red Blue Green Yellow






unit:mm

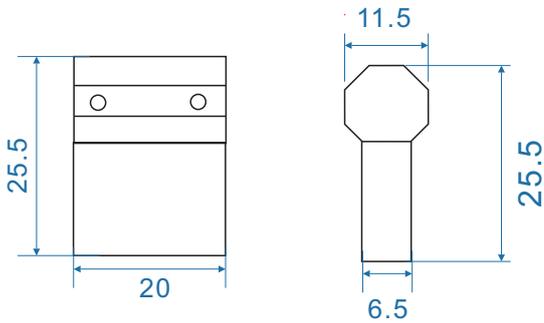


Transparent lock housing

It is made with clear transparent plastic PC (Polycarbonate) PC is high quality engineering plastic, It is very hard and resilient. it works well during the temperature -60°C to 150°C . It make sure the meter seals can works well outdoor and indoor.

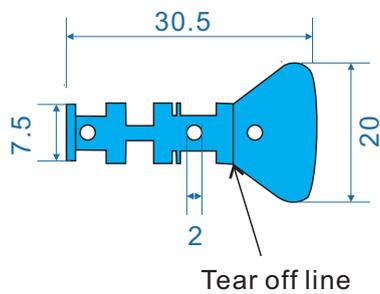

Color Rotor

It is made with PC. it only can go on clockwise way. Suggest the outside part is broken on the tear off line after sealing.

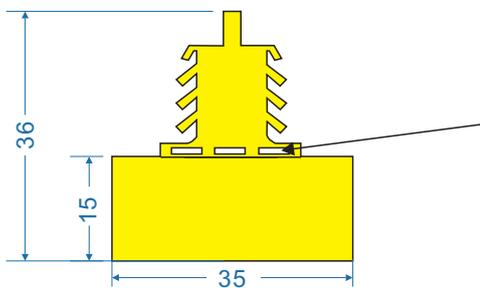

Sticker

It is made with PC. there are 8 hooks. Once somebody try to take out the sticker. it will be broken at here.